


### ASTRA 1N

Transponder: 1115  
 Frequenz: 12.663 GHz  
 Polarisation: Horizontal  
 Modulation: DVB-S (QPSK)  
 Symbolrate: 22.000MSymb  
 CodeRate: 5/6

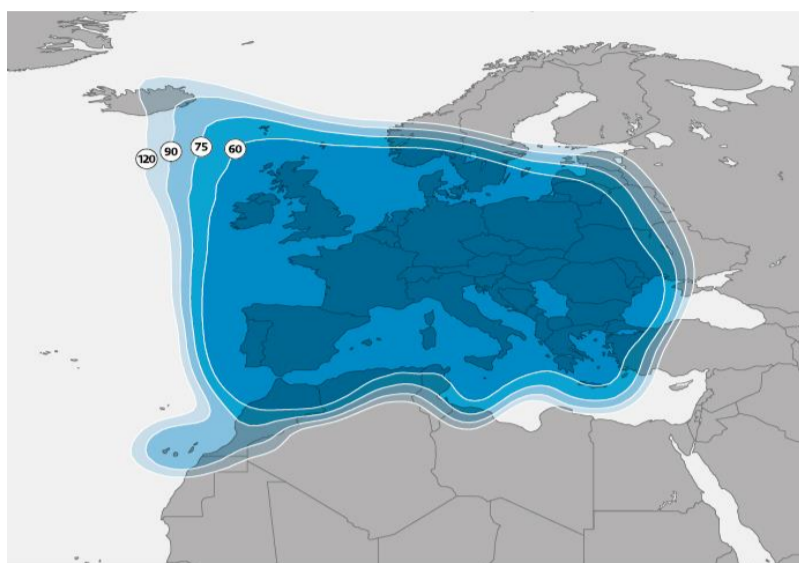

Sendername	Service Type	Verschlüsselung	SID	PMT	Video PID	PCR	Audio PID	TXT	AIT
<b>ORF III</b>	TV	Cryptoworks Irdeto NDS	13101	1101	1010	1010	1011/deu	1013	
<b>RTL Nitro A</b>	TV		13102	1102	1020	1020	1021/deu	1025	
<b>LT1-OOE</b>	TV		13104	1104	1040	1040	1041/deu		
<b>sixx Austria</b>	TV		13106	1106	1060	1060	1061/deu	1063	
<b>Visit-X.tv</b>	TV		13107	1107	1070	1070	1071/deu		
<b>Servus TV Deutschland</b>	TV		13110	1210	1110	1110	1111/deu 1112 eng	1115	
<b>Servus TV Österreich</b>	TV		13111	1211	2110	2110	2111/deu 2112/eng 2113/EAC3/deu	2115	
<b>L-TV</b>	TV		13113	1213	2130	2130	2131/deu		
<b>BTV</b>	TV		13141	1241	2410	2410	2411/deu		
<b>Welt der Wunder</b>	TV		13103	1103	1030		1031/deu		
<b>4News</b>	TV		13112	1212	2120				2126
<b>OE1</b>	Radio		13121	1121		421	421/deu		
<b>OE1 DD</b>	Radio		13122	1122		422	422/AC3/deu		
<b>OE2 W</b>	Radio		13123	1123		423	423/deu		
<b>OE2 N</b>	Radio		13124	1124		424	424/deu		
<b>OE2 B</b>	Radio		13125	1125		425	425/deu		
<b>OE2 O</b>	Radio		13126	1126		426	426/deu		
<b>OE2 S</b>	Radio		13127	1127		427	427/deu		
<b>OE2 T</b>	Radio		13128	1128		428	428/deu		
<b>OE2 V</b>	Radio		13129	1129		429	429/deu		
<b>OE2 St</b>	Radio		13130	1130		430	430/deu		
<b>OE2 K</b>	Radio		13131	1131		431	431/deu		
<b>OE3</b>	Radio		13133	1133		433	433/deu		
<b>FM4</b>	Radio		13134	1134		434	434/deu		
<b>U1 Tirol</b>	Radio		13136	1136		436	436/deu		
<b>Hope Channel Radio</b>	Radio		13139	1139		439	439/deu		
<b>RADIO MARIA</b>	Radio		13140	1140		440	440/deu		

#### Medieninhaber, Herausgeber und Hersteller:

Österreichische Rundfunksender GmbH & Co KG  
 Austrian Broadcasting Services  
 A-1136 Wien | Würzburggasse 30  
 Tel.: +43 | (0)1 | 870 40 - 12616  
 Fax: +43 | (0)1 | 870 40 - 12773  
 Email: office@ors.at | Homepage: www.ors.at